


## Product Highlights

- Operating temperature from -70°C to +200°C (-94°F to +392°F)
- Outstanding abrasion protection
- VW-1 acc. to UL 1441
- FAR Part 25
- Halogen-free
- Low toxicity, smoke generation and offgassing
- Does not trap heat or humidity
- Rot-free
- Expandable design accommodates a variety of sizes



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

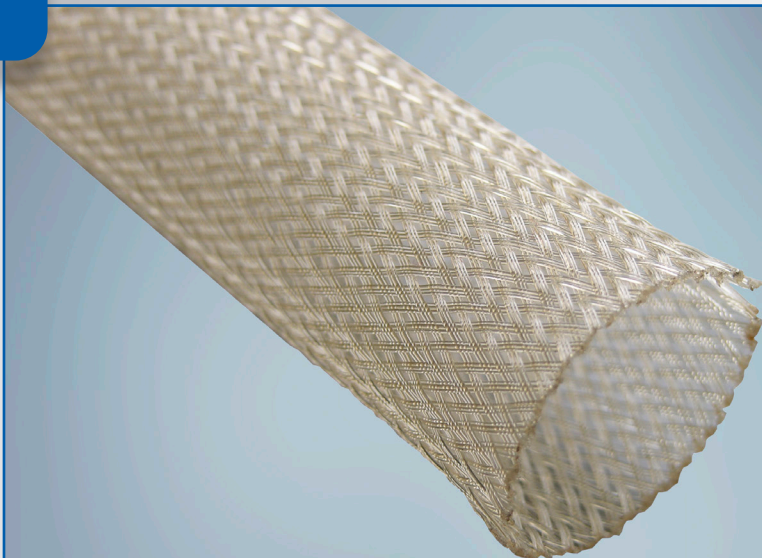

**Expando® 686DM** is an expandable oversleeve designed for mechanical protection in temperature extremes and hostile environmental conditions. Rated to +200°C (+392°F), Expando 686DM meets VW-1 and FAR Part 25 flammability requirements.

Featuring a dual monofilament construction, Expando 686DM blends larger PEEK (polyetheretherketone) guard strands with PPS (polyphenylene sulfide) support strands. The inherent properties of the raw materials give Expando 686DM low levels of flammability, toxicity, smoke generation and hard vacuum offgassing.

Expando 686DM is widely used in the aerospace industry for its outstanding properties in extreme environments. This product should be considered for aircraft, space, military, marine, and hostile-environment applications.

Expando® products are tough, lightweight oversleeves used to protect cable assemblies, hoses and wire harnesses from chafing, cutting and abrading. The braided construction of Expando products enables each size to expand to fit several application shapes and diameters. This open textile construction also makes them highly flexible and resistant to trapping water, heat and humidity.

# Performance Data – Expando® 686DM

Property	Test Method	Result
<b>Operating Temperature</b>		-70°C to +200°C (-94°F to +392°F)
<b>Low Temperature Flexibility</b>	MIL-DTL-23053E	-70°C
<b>Flammability</b>	UL 1441 FAR Part 25	VW-1 Pass
<b>Smoke Density</b>	ASTM E-662	D <sub>mc</sub> = 2.3
<b>Oxygen Index</b>	ASTM D-2863	36.5%
<b>Hard Vacuum</b>	ASTM E-595	Meets industry limits: 1.0% max 0.1% max
<b>Fluid Resistance</b> Jet Fuel JP-4 (MIL-T-5624) Hydraulic Fluid (MIL-H-5606) Lube Oil (MIL-I-7808) De-Ice Fluid (MIL-A-8243) Reference Oil #2 (ASTM D-471) Salt Water (O-S-1926)	MIL-DTL-23053	No visible degradation

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

## Product Specifications

Longitudinal shrinkage should be taken into account when utilizing expansion properties of the sleeve

Commercial Part Number	Recommended Application Range mm (in)		Maximum Weight g/m (lb/ft)	Standard Packaging m (ft)
	Min Ø	Max Ø		
Expando 686 DM 3-X	2 (3/32")	6 (1/4")	2.3 (0.0015)	610 (2,000')
Expando 686 DM 6-X	3 (1/8")	13 (1/2")	4.9 (0.0033)	305 (1,000')
Expando 686 DM 10-X	5 (3/16")	19 (3/4")	10.2 (0.0068)	152 (500')
Expando 686 DM 13-X	6 (1/4")	22 (7/8")	13.1 (0.0088)	152 (500')
Expando 686 DM 19-X	13 (1/2")	35 (1-3/8")	19.7 (0.0132)	152 (500')
Expando 686 DM 32-X	25 (1")	45 (1-3/4")	26.2 (0.0176)	76 (250')
Expando 686 DM 51-X	38 (1-1/2")	57 (2-1/4")	49.1 (0.0300)	76 (250')

X= Color Code: 0=Black 9=Natural

## Part Numbering System

Example	Product Name	Size	Color	Quantity
	Expando 686DM	13	0 (black)	152m (500 ft)



End view (enlarged diameter) of Expando® 686DM showing PEEK guard strands (larger) and PPS support strands (smaller, gray) in a typical configuration.



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600  
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560  
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565  
[www.tennecosp.com](http://www.tennecosp.com)



For informational purposes only. Tenneco makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. Tenneco's only obligations are those provided in its terms and conditions of sale for this product, and Tenneco will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2020 Tenneco Systems Protection, manufacturer of Bentley-Harris protection products.

EXP686DM-NA(EN-LTR)B